



X-POSTER SERIES INDOOR PANEL

The X-POSTER series is a multiple application bezel-free LED display panel that is elegant, robust, and affordable. This direct view all-in-one solution is the perfect alternative to traditional LCD displays and static printed banners. Each unit can operate individually or seamlessly interconnected with up to six total panels to create a contiguous HD display. Features include 800 nits of brightness, GOB protected LED modules, casters with adjustable leveling feet, and ease of use.



FIXED

RENTAL

FIXED & RENTAL. Designed to accommodate fixed installations or rental and staging applications.



GOB LED

GOB TECHNOLOGY. Collision, water, dust-proof coating to protect all LED's.



SEAMLESS

SEAMLESS DISPLAY. No undesirable gaps between LED modules.



LIGHT

LIGHTWEIGHT. Only 45kg/99lbs. Allows for easy transport and setup.




BRIGHT

HIGH BRIGHTNESS. Increased NIT level for optimal indoor visibility.



DIMENSIONS

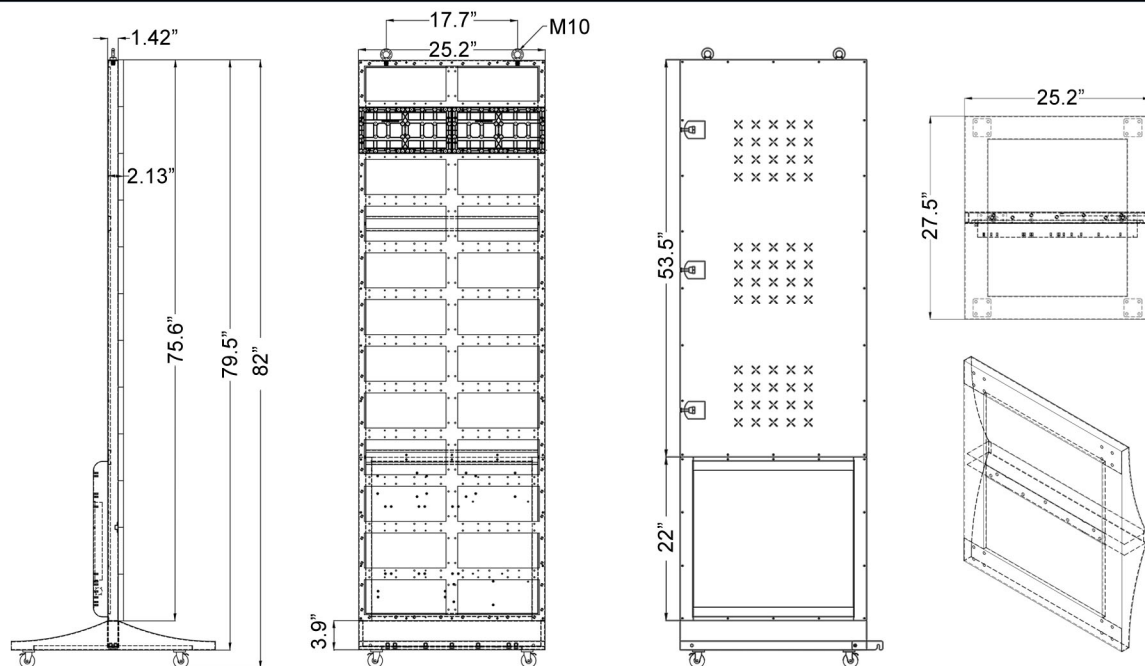

SPECIFICATIONS

	P1.8 GOB
Pixel Pitch	1.86mm
Resolution	1 Unit - 344 x 1032 / 6 Units - 2064 x 1032
LED Configuration	GOB SMD1515
Pixel Density	355,008
Panel Dimensions	25.2"W x 82"H x 2.13"D or 640 x 2082 x 54mm
Module Dimensions	320 x 160mm
Module Quantity	24 Per Unit
Weight	45kg / 99lbs with Base and Casters
Refresh Rate	3,840Hz
Brightness	≥800 Nits
Viewing Angle H/V	140°/140°
Display Colors	68.7 Billion
System Control	WiFi via NovaStar App, LAN, Cloud, Asynchronous/Synchronous Playback
Grayscale	14bit
Input Voltage / Frequency	110 ~ 240V / 50 ~ 60 Hz
Max. Power Consumption	550W
Avg. Power Consumption	180W
Operating Temperature	-10° ~ +40°
Lifetime	100,000 hours
Service Access	Front - Magnetic Modules
IP Rating	IP30
Certifications	ETL, FCC Class A, RoHS

* TECHNICAL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

YOUR VISION, ILLUMINATED



LED
SYSTEMS
DYNAMIC DIGITAL DISPLAY SOLUTIONS